
# S1 input module for datalogger MS

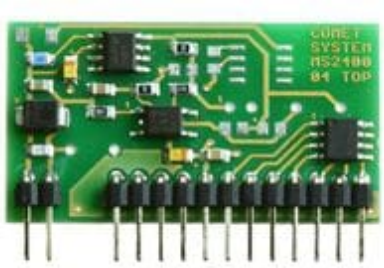

code: M1042

Binary voltage input. Voltage for "switched ON" state: 3 to 30Vdc, input current in the"switched ON" state: 1 to 9mA-depending on the applied voltage. Minimum duration for indication of change: 200ms, galvanically isolated. Galvanic isolation is not designed as safety protection.

## Technical data